



27805

PATENT TRADEMARK OFFICE

PATENT

Serial
#4

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of:

Applicant : Nicholas Paul Cowley et al.
Serial No. : 09/931,458
Filed : August 16, 2001
Title : TUNER
Docket No. : 534334-011

BOX MISSING PARTS
Commissioner for Patents
Washington, D.C. 20231

SUBMISSION OF PRIORITY DOCUMENT

Pursuant to the claim for priority under 35 U.S.C. §119 made in the Declaration in the above-identified application, the following priority document is submitted:

<u>Country</u>	<u>Application No.</u>	<u>Filing Date</u>
Great Britain	0020071.7	August 16, 2000

No fee is required. The Commissioner is authorized to charge any additional fees required by this paper (including the fee for any additional extension of time) or to credit any overpayment to Deposit Account No. 20-0809.

Respectfully submitted:

Date: November 12, 2001

By:

Theodore D. Lienesch
Reg. No. 28,235

THOMPSON HINE LLP
2000 Courthouse Plaza N.E.
10 West Second Street
Dayton, Ohio 45402-1758
Telephone: (937) 443-6958
Facsimile: (937) 443-6635

OFFICE OF THE

ATTORNEY GENERAL

WASHINGTON, D.C.

20540

20540

20540

RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540

This Page Blank (uspto)
RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540

RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540

RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540

RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540

RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540

RECEIVED
JAN 10 1964
U.S. DEPARTMENT OF JUSTICE
OFFICE OF THE ATTORNEY GENERAL
WASHINGTON, D.C. 20540



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Signed

Dated

8 August 2001

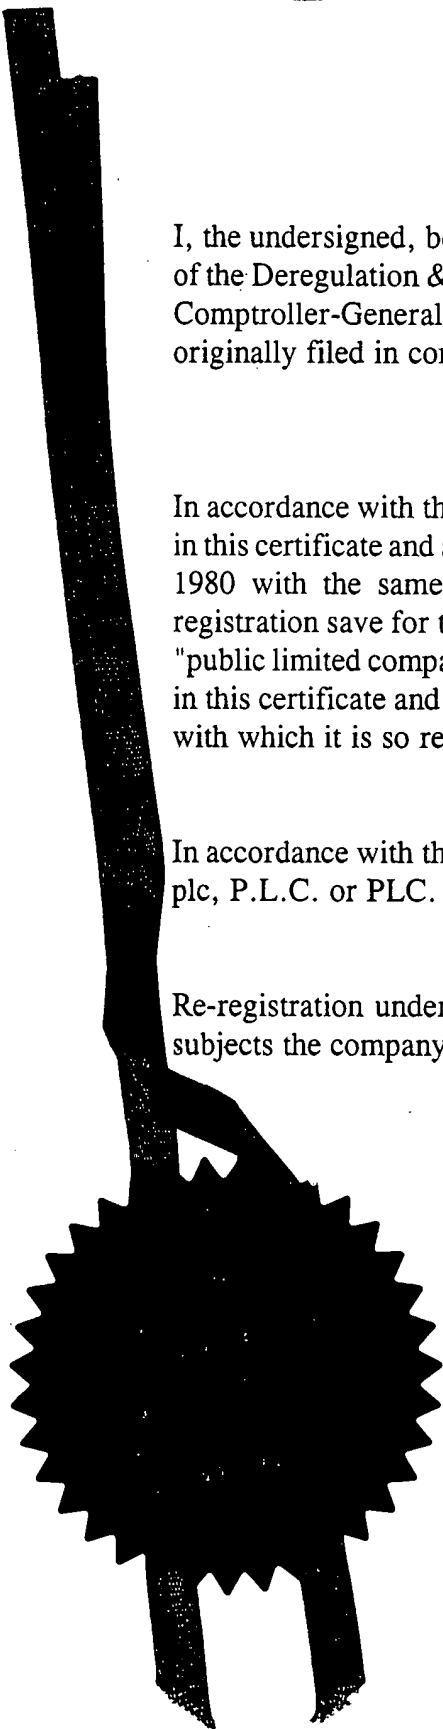

This Page Blank (uspto)

Act 1977



1/77

THE PATENT OFFICE
16 AUG 2000
NEWPORT

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference JSR.P51158GB

2. Patent application number
(The Patent Office will fill in this part) 0020071.7 16 AUG 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Mitel Semiconductor Limited
Cheney Manor
Swindon
Wiltshire SN2 2QW
16AUG00 E561027-1 001063
P01/7700 0.00-0020071.7

Patents ADP number (if you know it)

7387442001

If the applicant is a corporate body, give the country/state of its incorporation

British

4. Title of the invention
Tuner

5. Name of your agent (if you have one) Marks & Clerk

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk
4220 Nash Court
Oxford Business Park South
Oxford
OX4 2RU

Patents ADP number (if you know it)

727 1125 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Yes

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form (none)

Description 8

Claim(s) 2

Abstract 1

Drawing(s) 2 *to*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature Marks & Clerk

Mark & Clerk

Date 14 August, 2000

12. Name and daytime telephone number of person to contact in the United Kingdom J S Robinson - 01865 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Statement of inventorship and of
right to grant of a patent

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

JSR.P51158GB

2. Patent application number
(if you know it)

0020071.7

THE PATENT OFFICE
A
16 AUG 2000

NEWPORT

16 AUG 2000

3. Full name of the or of each applicant

Mitel Semiconductor Limited

4. Title of the invention

Tuner

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent

By virtue of employment and by virtue of assignment.

6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))

None

7. I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

Signature

Marks & Clerk

Date

Marks & Clerk

14 August 2000

8. Name and daytime telephone number of
person to contact in the United Kingdom

J S Robinson - 01865 397900

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.



This Page Blank (uspto)

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Nicholas Paul Cowley
3 Priors Hill
Wroughton
Wiltshire
SN4 0RT

Patents ADP number (if you know it):

1017722003

Alison Payne
23 Mayflower Road
London
SW9 9JY

Patents ADP number (if you know it):

7961444001

Mark Dawkins
73 Arthur Court
Charlotte Despard Avenue
London
SW11 5JB

Patents ADP number (if you know it):

7961451001

Reminder

Have you signed the form?

This Page Blank (uspto)

DUPLICATE

TUNER

The present invention relates to a tuner. Such a tuner may, for example, be used for receiving television signals and may form part of a set-top box, a television receiver or a video cassette recorder.

The DVB-T (Digital Video Broadcasting – Terrestrial) standard for DTT (Digital Terrestrial Television) employs Coded Orthogonal Frequency Division Multiplexing (COFDM) as the modulation scheme for transmission of the digital bit-stream. Implementation of the modulators and demodulators in this system is accomplished using the Inverse Fast Fourier Transform (IFFT) algorithm to generate the time domain signal from the complex frequency domain representation at the transmitter and the Fast Fourier Transform (FFT) to recover the complex constellation of data points at the receiver. These operations apply to separate COFDM “symbols” of a length in time equal to the reciprocal of the individual carrier spacing. Thus, each symbol corresponds to a constellation of points in the complex plane, i.e. each carrier has fixed amplitude and phase for the duration of a symbol.

Impulse noise may occur via switching transients of nearby appliances, such as fridges and power tools. An important marketing point of DTT is the ease of installation, allowing the consumer to set the system up alone. This unfortunately makes it likely that, in many case, a far from ideal installation will be achieved, increasing the likelihood of poor interference protection.

If impulse noise occurs superimposed on the received radio frequency (RF) signal at the antenna, this will appear at the input to the FFT as the impulse response of the intervening tuner/receiver components. The impulse energy in band will typically have a wide band sinc-type envelope and will flood the received data spectrum, causing many errors in one transmitted COFDM symbol. Once the spectrum after the FFT is corrupted, correction is not possible and it is the nature of the COFDM modulation scheme that makes it vulnerable to impulse noise. However, digitisation of the COFDM signal at intermediate frequency (IF) by an analogue/digital converter (ADC) tends to

suppress impulse noise in conventional tuner designs. These will suppress unwanted channels in the analogue domain prior to the ADC. Hence the whole dynamic range of the ADC will be filled with the unwanted channel signal. High level impulsive noise will be clipped at the ADC, assuming that the receiver AGC loop does not "capture" the impulse level and adjust the gain. This is very unlikely as the impulse will by definition be a short pulse, of the order of nanoseconds in length.

There is a desire to increase processing in the Digital domain, thus shifting the tight specifications to the ADC. In such systems, it is probable that any adjacent channel unwanted energy will be digitised by the ADC along with the desired channel. In this case, if the adjacent channel is at a higher level (for example in the UK where it may be +35dB relative to the wanted DVB-T channel), only part of the ADC dynamic range will be occupied by the wanted signal, allowing a much higher level impulse through to the FFT. This will in turn translate to much higher level interference across the wanted spectrum of COFDM carriers, causing extremely high error rates for the symbol in which the impulse occurred.

Figure 1 of the accompanying drawings shows typical conditions for such a direct tuner system receiving a wanted signal at 35dB below an adjacent channel (a PAL Analogue TV channel). This drawing illustrates the three components of the signal at the ADC input, namely the adjacent channel PAL signal, the desired COFDM signal and the noise impulse. If an impulse occurs at an amplitude +50dB relative to the PAL peak amplitude and is then clipped to that same amplitude, the received complex constellation after FFT will show a bit error rate (BER) prior to any Viterbi decoding of the order of 40% (for Quasi Error free transmission, this value should be less than 1%). Such an increase in BER will not cause problems with receiver lock, as long as the impulse occurs infrequently. However, it is possible that visible distortion will occur on the picture, depending on the programme being viewed and the MPEG-2 decoder chip. If impulsive noise corrupts consecutive symbols, the problem will become more severe.

According to a first aspect of the invention, there is provided a tuner comprising an input section for converting a radio frequency signal to a sampled intermediate signal, a

threshold generator for generating a threshold as a function of an average of the amplitudes of a plurality of samples of the intermediate signal, a comparator for comparing the amplitude of each of the samples with the threshold, and a corrector responsive to the comparator for blanking each of the samples whose amplitude is greater than the threshold.

The corrector may be arranged to block n consecutive samples after each sample whose amplitude is greater than the threshold, where n is a positive integer. n may be a second function of the impulse response of the input section.

The average may be a moving average.

The average may exclude each of the samples which is blanked by the corrector.

The threshold may be greater than the product of the average and the peak-to-average ratio of the intermediate signal.

The threshold may be greater than three times the average. The threshold may be substantially equal to 5.3 times the average.

The samples may have a sample rate of 9.143MHz. n may be greater than 1 and less than 5. The moving average may be over a window of substantially 1000 consecutive samples.

The input section may comprise a zero intermediate frequency converter.

The input section may supply the samples at in-phase and quadrature outputs.

The input section may comprise an analogue/digital converter for forming the samples as digital samples.

The tuner may be provided for receiving COFDM signals.

The tuner may comprise a fast Fourier transformer for processing samples from the corrector.

The tuner may be provided for receiving television signals.

According to further aspects of the invention, there are provided a set-top box, a television receiver and a television signal recorder, each comprising a tuner according to the first aspect of the invention.

It is thus possible to provide a tuner whose performance is substantially improved under impulsive noise conditions. In the case of digital television signals, bit error rate performance can be substantially improved so that picture interference is reduced.

These techniques are particularly useful for modulation schemes which make use of a fast Fourier transform algorithm in the tuner, for example to extract the complex value of each carrier in a COFDM scheme.

The invention will be further described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a waveform diagram illustrating an impulse-corrupted digital television signal and a high level adjacent channel PAL analogue signal;

Figure 2 is a block circuit and functional diagram illustrating a tuner constituting an embodiment of the invention; and

Figure 3 illustrates diagrammatically the effect of impulsive noise interference and the improvement in performance which may be achieved by the tuner of Figure 2.

The COFDM television tuner shown in Figure 2 is connected to an aerial input 1 and comprises an input automatic gain control (AGC) amplifier 2 whose output is connected to first and second mixers 3 and 4. The mixers 3 and 4 form part of a zero intermediate frequency (ZIF) frequency converter for converting the input signals

directly to baseband signals. A local oscillator 5 supplies local oscillator signals to the mixers 3 and 4 which are in phase quadrature with respect to each other so that the mixer 3 produces an in-phase signal I and the mixer 4 produces a quadrature phase signal Q. the outputs of the mixers 3 and 4 are supplied via buffer amplifiers 6 and 7, respectively, to low pass filters 8 and 9, respectively, which attenuate or eliminate energy outside the zero intermediate frequency bandwidth. The outputs of the filters 8 and 9 are supplied via further buffer amplifiers 10 and 11, respectively, to an analogue/digital converter (ADC) 12.

The parts 2 to 11 of the tuner represent an analogue section whose quadrature output signals are converted by the ADC 12 to the digital domain. The remaining parts of the tuner operate in the digital domain and are illustrated as functional blocks in Figure 2 although they would normally be embodied by dedicated digital hardware or possibly by a programmable data processor under software control.

The outputs of the ADC 12 are supplied via digital low pass filters 13 and 14 to an automatic frequency control (AFC) circuit 15, which centres the signals exactly around 0Hz.

The digitised samples of the I and Q signals formed by the ADC 12, filtered by the filters 13 and 14 and centred on 0Hz by the circuit 15 are supplied to the inputs of a threshold generator 16, a comparator 17 and a corrector 18. In a typical example of the tuner shown in Figure 2, the ADC 12 samples the incoming signals at a sample rate of 9.143MHz. The threshold generator 16 forms a moving average of a number of consecutive samples of each of the I and Q signals. In the specific example mentioned above, the moving window covers about 1000 consecutive samples.

In order to generate a threshold which is capable of discriminating impulsive noise signals, the threshold generator 16 makes use of the known peak-to-mean ratio of COFDM signals, which is about 9.5 decibels (dB) (a ratio of about 3:1). In order to avoid false triggering, the threshold generator 16 sets the threshold at 5dB higher than this so that the threshold supplied to the comparator 17 by the generator 16 is

substantially equal to 5.3 times the moving window average of the amplitudes of the samples.

The comparator 17 compares each of the I and Q samples with the threshold and signals the corrector 18 whenever the amplitude of a sample exceeds the current value of the threshold. In response to such signalling, the corrector 18 sets the value of the sample to 0. The corrector 18 also sets the values of one or more immediately succeeding consecutive samples to 0. In particular, the noise impulse is spread by the impulse response of the section of the tuner upstream of the corrector 18 and the number of consecutive samples which are set to zero or blanked is determined in accordance with the impulse response so as to remove as much impulsive noise energy as possible from the signal supplied to each of the outputs of the corrector 18. For the specific example mentioned above, it has been found that the number of consecutive samples which could be set to 0 or blanked is typically from 3 to 5 samples. However, the impulse response of the upstream section can be calculated or measured for any particular arrangement and this may be used to establish the number of consecutive samples which will be unavoidably corrupted by impulsive noise and which should therefore be blanked.

If the tuner input section has an excessively long impulse response, for example corresponding to 10 or more samples, it is possible that the effects of such impulsive noise cannot be corrected satisfactorily because blanking 10 or more consecutive samples may introduce an unacceptably large number of errors. In such a case, the impulse response of the tuner, particularly the analogue low pass filters 8 and 9 and the digital low pass filters 13 and 14 should be improved in order to achieve satisfactory performance.

It may be desirable, as shown in Figure 2, for the corrector 18 to supply a signal to the threshold generator 16 indicating which samples have been blanked. The threshold generator 16 may then ignore or delete such samples from the process of generating the average on which the threshold is based.

The I and Q outputs of the corrector 18 are supplied to the inputs of a fast Fourier transform 19 which converts the time-domain digitised sampled signal to the complex frequency domain. The output of the transform 19 is then passed to a block 20 for further processing, such as demodulation and decoding in order to supply image signals suitable for display by a television receiver or for recording by a video cassette recorder.

Figure 3 illustrates the time-domain input signals to the transform 19 and the resulting frequency-domain constellation at the output of the transform 19 for a "clean" signal without interference, for an uncorrected signal suffering impulsive interference, and for a corrected signal in accordance with the noise correction or reduction described hereinbefore and illustrated in Figure 2. The corresponding bit error rates are also indicated. The clean signal is assumed to have a signal-to-noise ratio (SNR) of 35 dB. Such a signal produces a 0 BER.

The corrupted signal is corrupted by an impulse with an amplitude of 50dB and a duration of 5 nanoseconds. The resulting constellation at the output of the transform 19 is very seriously corrupted and results in a BER of 45%.

The impulse correction technique described hereinbefore provides a constellation at the output of the transform 19 which much more closely resembles the actual constellation of the clean signal. In this case, the BER is 2.5% which, although not corresponding to quasi error free reception, represents a substantial improvement and permits acceptable television pictures to be displayed with relatively unobtrusive interference artefacts.

The use of this technique is very advantageous if more than one COFDM symbol is affected. Without correction, it is likely that the picture displayed on the television screen would quickly become unviewable or completely lost. With correction, although quasi error free reception would not be possible, there should not be an interruption in viewing. Instead, there may be some noticeable but tolerable picture interference.

Although this technique has been described in detail with respect to a COFDM modulation scheme for digital television signals in the context of a zero intermediate

frequency conversion technique, it may be applied to other types of systems where impulsive noise interference is problematic. The technique is particularly useful for tuners where a large amount of the signal processing is performed in the digital domain and where there is relatively less frequency domain filtering before the analogue/digital conversion. In particular, this technique allows such tuners to be provided with an adequate performance and thus reduces the requirements for filtering in the analogue domain. This in turn eases the design of "on-chip" analogue filters. The technique is particularly useful for any demodulation scheme employing the FFT and possible other applications include digital audio broadcasting (DAB) and any system using a form of OFDM modulation.

CLAIMS:

1. A tuner comprising an input section for converting a radio frequency signal to a sampled intermediate signal, a threshold generator for generating a threshold as a first function of an average of the amplitudes of a plurality of samples of the intermediate signal, a comparator for comparing the amplitude of each of the samples with the threshold, and a corrector responsive to the comparator for blanking each of the samples whose amplitude is greater than the threshold.
2. A tuner as claimed in claim 1, in which the corrector is arranged to blank n consecutive samples after each sample whose amplitude is greater than the threshold, where n is a positive integer.
3. A tuner as claimed in claim 2, in which n is a second function of the impulse response of the input section.
4. A tuner as claimed in any one of the preceding claims, in which the average is a moving average.
5. A tuner as claimed in any one of the preceding claims, in which the average excludes each of the samples which is blanked by the corrector.
6. A tuner as claimed in any one of the preceding claims, in which the threshold is greater than the product of the average and the peak-to-average ratio of the intermediate signal.
7. A tuner as claimed in any one of the preceding claims, in which the threshold is greater than three times the average.
8. A tuner as claimed in claim 7, in which the threshold is substantially equal to 5.3 times the average.

9. A tuner as claimed in any one of the preceding claims, in which the samples have a sample rate of 9.143MHz.
10. A tuner as claimed in claim 9 when dependent on claim 2, in which n is greater than one and less than five.
11. A tuner as claimed in claim 9 or 10 when dependent on claim 4, in which the moving average is over a window of substantially 1000 consecutive samples.
12. A tuner as claimed in any one of the preceding claims, in which the input section comprises a zero intermediate frequency converter.
13. A tuner as claimed in any one of the preceding claims, in which the input section supplies the samples at in-phase and quadrature outputs.
14. A tuner as claimed in any one of the preceding claims, in which the input section comprises an analogue/digital converter for forming the samples as digital samples.
15. A tuner as claimed in any one of the preceding claims, for receiving COFDM signals.
16. A tuner as claimed in any one of the preceding claims, comprising a fast Fourier transformer for processing samples from the converter.
17. A tuner as claimed in any one of the preceding claims, for receiving television signals.
18. A set top box comprising a tuner as claimed in claim 17.
19. A television receiver comprising a tuner as claimed in claim 17.
20. A television signal recorder comprising a tuner as claimed in claim 17.

ABSTRACT TUNER

(Figure 2)

A tuner for digital terrestrial television has an input section 2-15 which supplies a sampled intermediate signal, for example at zero intermediate frequency and digitised by an ADC 12, corresponding to a desired reception channel corrupted by interference such as impulsive noise interference. A threshold generator 16 generates a threshold which is larger than a moving average of the amplitudes of consecutive samples and a comparator 17 compares the amplitudes of the samples with the threshold. If a sample amplitude exceeds the threshold, a corrector 18 blanks the sample before processing by a fast Fourier transform 19.

This Page Blank (uspto)

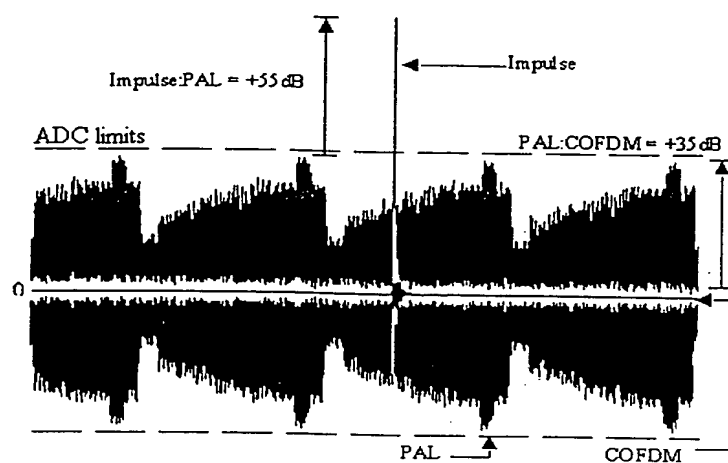


Figure 1

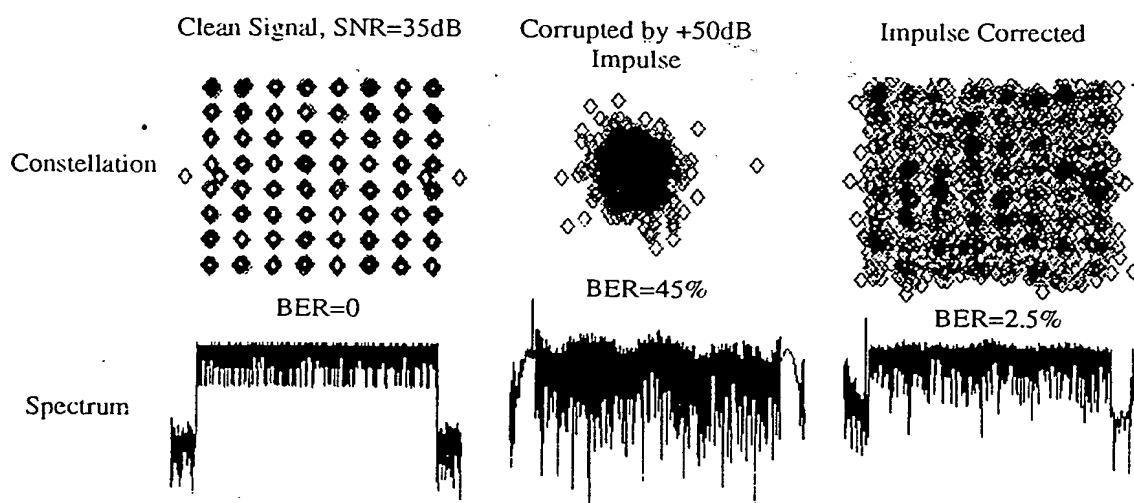


Figure 3

This Page Blank (uspto)

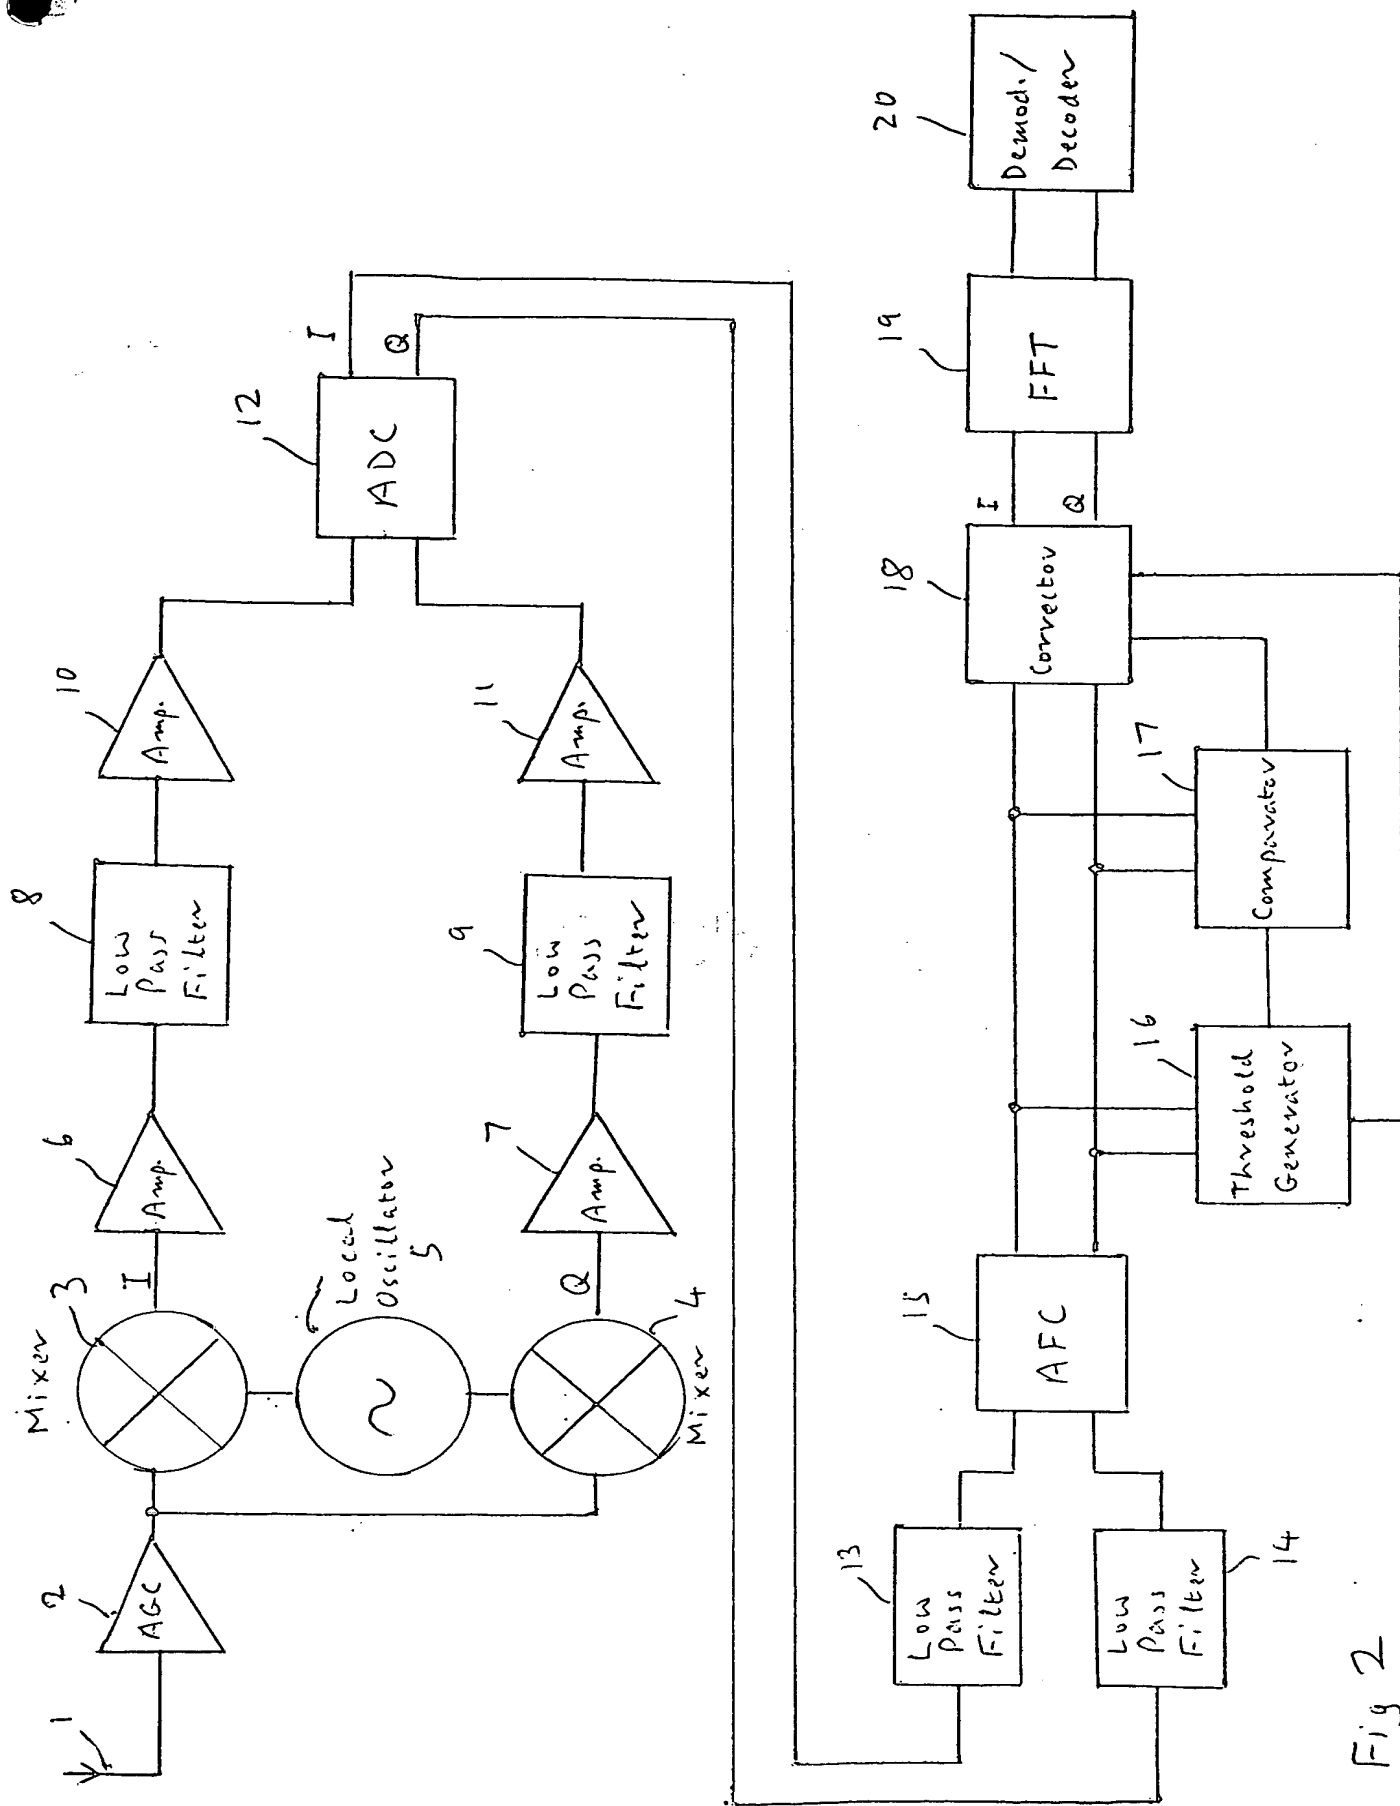


Fig 2

This Page Blank (uspto)